


**CAUTION!** Replacing any bulb requires the use of safety glasses to prevent injury!

**CAUTION!** Do not handle the bulb with bare hands. Use gloves to prevent injury!

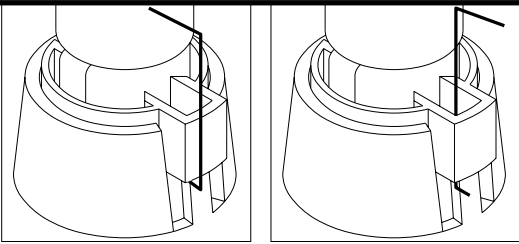


*To replace a Snap-In bulb....*

1. Be sure the power to the lamp is turned off.
2. Locate the removal tool included with your new bulb. Use the small end of the tool to lift the base of the bulb assembly away from the socket as shown. Continue to lift until the bulb is free. Use either of these illustrated methods for best results, depending upon application. Use pliers to hold the tool and aid bulb removal.
3. Insert the alignment tab of the new bulb into the bulb holder and press firmly into the socket to lock the new bulb into place.

Form No.13081F (081399)

**CAUTION!** Replacing any bulb requires the use of safety glasses to prevent injury!

**CAUTION!** Do not handle the bulb with bare hands. Use gloves to prevent injury!

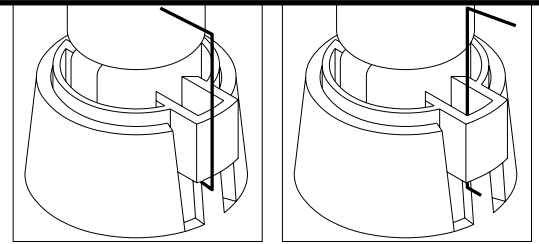


*To replace a Snap-In bulb....*

1. Be sure the power to the lamp is turned off.
2. Locate the removal tool included with your new bulb. Use the small end of the tool to lift the base of the bulb assembly away from the socket as shown. Continue to lift until the bulb is free. Use either of these illustrated methods for best results, depending upon application. Use pliers to hold the tool and aid bulb removal.
3. Insert the alignment tab of the new bulb into the bulb holder and press firmly into the socket to lock the new bulb into place.

Form No.13081F (081399)

**CAUTION!** Replacing any bulb requires the use of safety glasses to prevent injury!

**CAUTION!** Do not handle the bulb with bare hands. Use gloves to prevent injury!

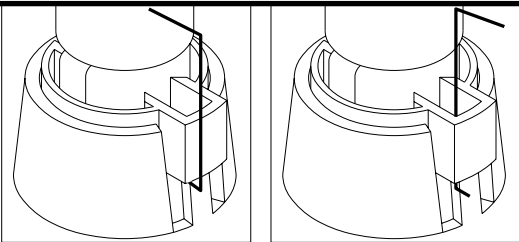


*To replace a Snap-In bulb....*

1. Be sure the power to the lamp is turned off.
2. Locate the removal tool included with your new bulb. Use the small end of the tool to lift the base of the bulb assembly away from the socket as shown. Continue to lift until the bulb is free. Use either of these illustrated methods for best results, depending upon application. Use pliers to hold the tool and aid bulb removal.
3. Insert the alignment tab of the new bulb into the bulb holder and press firmly into the socket to lock the new bulb into place.

Form No.13081F (081399)

**CAUTION!** Replacing any bulb requires the use of safety glasses to prevent injury!

**CAUTION!** Do not handle the bulb with bare hands. Use gloves to prevent injury!

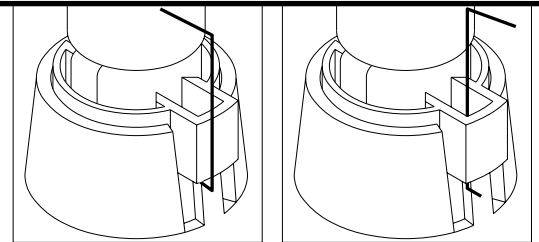


*To replace a Snap-In bulb....*

1. Be sure the power to the lamp is turned off.
2. Locate the removal tool included with your new bulb. Use the small end of the tool to lift the base of the bulb assembly away from the socket as shown. Continue to lift until the bulb is free. Use either of these illustrated methods for best results, depending upon application. Use pliers to hold the tool and aid bulb removal.
3. Insert the alignment tab of the new bulb into the bulb holder and press firmly into the socket to lock the new bulb into place.

Form No.13081F (081399)

**CAUTION!** Replacing any bulb requires the use of safety glasses to prevent injury!

**CAUTION!** Do not handle the bulb with bare hands. Use gloves to prevent injury!

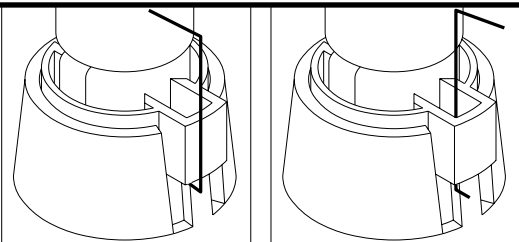


*To replace a Snap-In bulb....*

1. Be sure the power to the lamp is turned off.
2. Locate the removal tool included with your new bulb. Use the small end of the tool to lift the base of the bulb assembly away from the socket as shown. Continue to lift until the bulb is free. Use either of these illustrated methods for best results, depending upon application. Use pliers to hold the tool and aid bulb removal.
3. Insert the alignment tab of the new bulb into the bulb holder and press firmly into the socket to lock the new bulb into place.

Form No.13081F (081399)

**CAUTION!** Replacing any bulb requires the use of safety glasses to prevent injury!

**CAUTION!** Do not handle the bulb with bare hands. Use gloves to prevent injury!

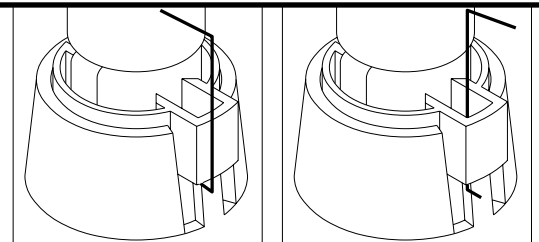

*To replace a Snap-In bulb....*

1. Be sure the power to the lamp is turned off.
2. Locate the removal tool included with your new bulb. Use the small end of the tool to lift the base of the bulb assembly away from the socket as shown. Continue to lift until the bulb is free. Use either of these illustrated methods for best results, depending upon application. Use pliers to hold the tool and aid bulb removal.
3. Insert the alignment tab of the new bulb into the bulb holder and press firmly into the socket to lock the new bulb into place.

Form No.13081F (081399)