

ROUTE 145, WINTHROP ROAD
CHESTER, CONNECTICUT 06412-0684
TELEPHONE: (860) 526-9504
FAX: (860) 526-4078

Mounting the grill light housing...

1. Remove the grill from the vehicle.
2. Locate the adhesive-backed template sheet included with your housing.
3. CAREFULLY cut out each template (Left and Right) making sure to follow the indicated "cut" lines EXACTLY. Do not remove the protective backing yet.
4. Position the passenger side template on the upper corner of the passenger side of the grill (See Fig. 1). Correct placement of the template is achieved when the "A" guide is aligned with the side of the grill and the "B" guide is aligned with the top of the grill.
5. Remove the protective backing from the template and return it to the location determined in step 4.
6. Using a jig saw, or other suitable cutting tool, carefully trim the grill along the indicated trim guides on the template.


WARNING! Do not cut the horizontal section of the grill EXCEPT where a notch is specified to be cut in the lower, outer corner of the trimming area (See Fig. 2).

7. Position the passenger side grill light housing into its mounting location. If the housing does not initially fit properly, trim the grill until proper mounting is achieved.

8. Locate the inner and outer mounting brackets and their corresponding hardware (Fig. 2).
9. Insert one grommet into each of the mounting brackets as shown in Fig.2.
10. Position the inner mounting bracket into the area indicated in Fig.2, making sure that the "hook" and "plate" are located as shown in the illustration. With the bracket in place, insert the #8 x 5/8" sheet metal screw through the round hole in the grill light housing, and into the grommet in the mounting bracket. Tighten screw until the mounting bracket is engaged enough to hold the housing in position.
11. Position the outer mounting bracket into the area indicated in Fig.2, making sure that the "plate" is located as shown in the illustration. With the bracket in place, insert the #8 x 5/8" sheet metal screw through the round hole in the grill light housing, and into the grommet in the mounting bracket. Tighten screw firmly and repeat for the inner bracket's screw.

The passenger side grill light housing is now mounted. The same procedure used for mounting the passenger side housing will be used for the driver side housing. When positioning the driver side template on the grill, correct placement of the template is achieved when the "C" guide is aligned with the side of the grill and the "D" guide is aligned with the top of the grill.

The outer surfaces of this product may be cleaned with mild soap and water. Use of any other chemicals may void product warranty. Do not use a pressure washer.

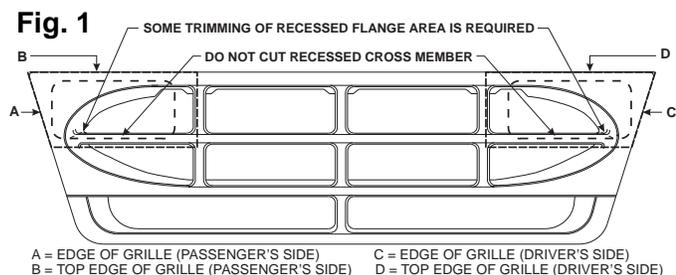

Parts List

GRILL LIGHT HOUSING (PASSENGER SIDE)	11-481692-000
GRILL LIGHT HOUSING (DRIVER SIDE)	11-481691-000
TEMPLATE (PASSENGER SIDE)	04-0562485-00
TEMPLATE (DRIVER SIDE)	04-0562485-01
FASTEX GROMMET	21-17060704-3

Fig. 2 Passenger side shown

