

## PRODUCT DESCRIPTION

### Model WS15T, LOUDSPEAKER ASSEMBLY

Part # 01C1461234-00

Doc. # 04-0113172-01

#### GENERAL

Whelen Model WS15T is a 15 watt speaker intended for use in personnel warning applications.

The speaker consists of all metal construction. All exposed metal parts are gray baked epoxy finished, to eliminate corrosion. The speaker incorporates a high efficiency double re-entrant loudspeaker.

An internal impedance matching transformer allows the user to select reduced output power levels.

#### INSTALLATION

The WS15T comes with a swivel mounting base that allows for vertical and horizontal positioning with a single adjustment.

Determine the location of the speaker and mount the speaker. Use the mounting foot detail below, for either screws or strapping.

Connect the speaker cable to the speaker driver. Notice that the terminals are marked 1 and 2. Speaker connections are:

Speaker (+) wire to Terminal 1

Speaker (-) wire to Terminal 2

#### Dimensions


Width:	8.0" (20.3 cm)
Height:	8.0" (20.3 cm)
Depth:	9.0" (22.9 cm)
Weight	4.0 lbs. (1.9 kg)
Finish	Gray, baked epoxy

Dispersion: 100 °

#### Performance (at 4 ft., 500 Hz)

SPL:	Tap	Watts	dBA
	1	0.9	103
	2	1.8	107
	3	3.8	110
	4	7.5	113
	5	15	116
	6	Do Not Use	
	7	Do Not Use	

Measurement based on Whelen Amplifier 01-0285564-00C.

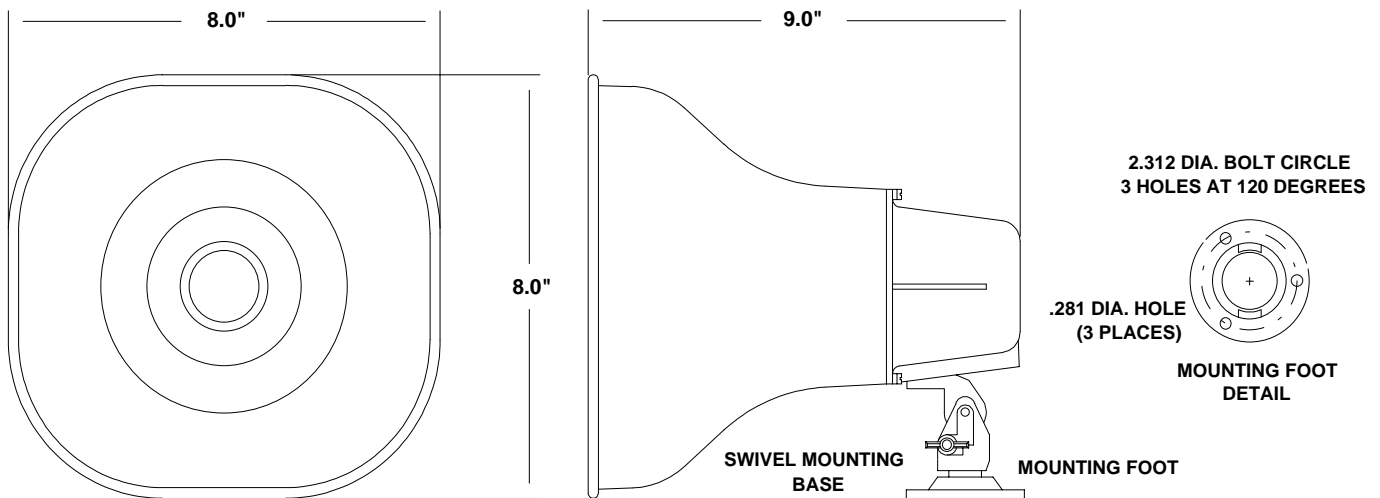

PIONEERS IN WARNING SIGNALS  
**WHELEN**®  
ENGINEERING COMPANY, INC.

Route 145, Winthrop Rd., Chester, CT 06412-0684  
Tel.: (800) 63 SIREN Fax: (860) 526-4784