


CAUTION! Replacing any halogen bulb requires the use of safety glasses to prevent injury.
CAUTION! Do not handle the bulb with bare hands. Use gloves to prevent possible injury.

To replace an H2-type Halogen Bulb....

1. Be sure the power to the lamp is turned off.
2. Grasp the metal sides of the base of the bulb (**Not** the glass) and gently pull the bulb in an upward direction until it is free.
3. Insert the new bulb into the bulb holder and press downwards until the bulb has "bottomed-out" on the socket.

Form No.13286 (120197)

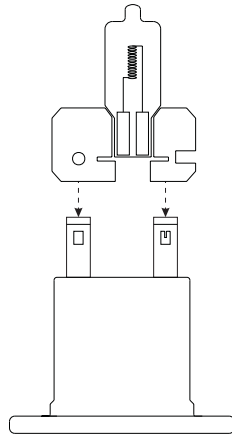


CAUTION! Replacing any halogen bulb requires the use of safety glasses to prevent injury.
CAUTION! Do not handle the bulb with bare hands. Use gloves to prevent possible injury.

To replace an H2-type Halogen Bulb....

1. Be sure the power to the lamp is turned off.
2. Grasp the metal sides of the base of the bulb (**Not** the glass) and gently pull the bulb in an upward direction until it is free.
3. Insert the new bulb into the bulb holder and press downwards until the bulb has "bottomed-out" on the socket.

Form No.13286 (120197)

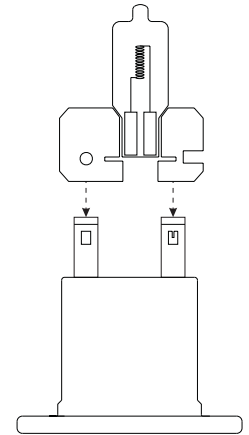


CAUTION! Replacing any halogen bulb requires the use of safety glasses to prevent injury.
CAUTION! Do not handle the bulb with bare hands. Use gloves to prevent possible injury.

To replace an H2-type Halogen Bulb....

1. Be sure the power to the lamp is turned off.
2. Grasp the metal sides of the base of the bulb (**Not** the glass) and gently pull the bulb in an upward direction until it is free.
3. Insert the new bulb into the bulb holder and press downwards until the bulb has "bottomed-out" on the socket.

Form No.13286 (120197)

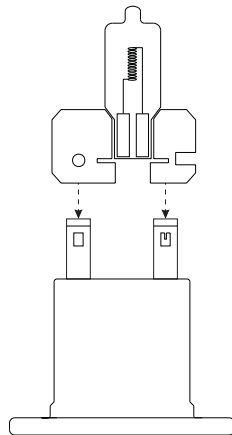


CAUTION! Replacing any halogen bulb requires the use of safety glasses to prevent injury.
CAUTION! Do not handle the bulb with bare hands. Use gloves to prevent possible injury.

To replace an H2-type Halogen Bulb....

1. Be sure the power to the lamp is turned off.
2. Grasp the metal sides of the base of the bulb (**Not** the glass) and gently pull the bulb in an upward direction until it is free.
3. Insert the new bulb into the bulb holder and press downwards until the bulb has "bottomed-out" on the socket.

Form No.13286 (120197)

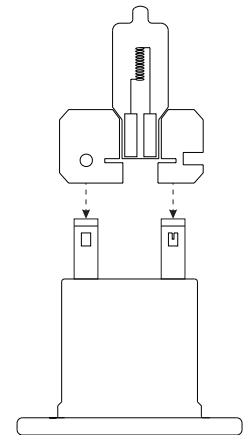


CAUTION! Replacing any halogen bulb requires the use of safety glasses to prevent injury.
CAUTION! Do not handle the bulb with bare hands. Use gloves to prevent possible injury.

To replace an H2-type Halogen Bulb....

1. Be sure the power to the lamp is turned off.
2. Grasp the metal sides of the base of the bulb (**Not** the glass) and gently pull the bulb in an upward direction until it is free.
3. Insert the new bulb into the bulb holder and press downwards until the bulb has "bottomed-out" on the socket.

Form No.13286 (120197)

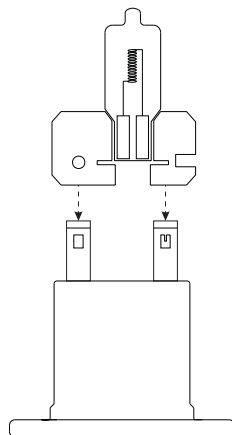

CAUTION! Replacing any halogen bulb requires the use of safety glasses to prevent injury.
CAUTION! Do not handle the bulb with bare hands. Use gloves to prevent possible injury.

To replace an H2-type Halogen Bulb....

1. Be sure the power to the lamp is turned off.
2. Grasp the metal sides of the base of the bulb (**Not** the glass) and gently pull the bulb in an upward direction until it is free.
3. Insert the new bulb into the bulb holder and press downwards until the bulb has "bottomed-out" on the socket.

Form No.13286 (120197)

