


ROUTE 145, WINTHROP ROAD
CHESTER, CONNECTICUT 06412-0684
TELEPHONE: (860) 526-9504
FAX: (860) 526-4078

Installation...

1. Position the 43 lighthead in its approximate mounting location. Make sure that the lighthead will not interfere with any existing equipment. Also be aware of any and all items on the opposite side of the mounting surface to prevent any possible damage to existing components.
 2. Position the supplied mounting template on the mounting location and temporarily secure it to the surface. Be sure the template is FLAT against the surface.
- NOTE:** Before proceeding, place the reflector against the template and confirm that the mounting holes on the template line up with the actual mounting holes on the reflector.
3. Using an appropriately sized drill bit, drill the mounting holes as shown on the template.
 4. Using a cutting tool, cut an opening in the mounting surface as indicated on the template.
 5. Route the cable assembly towards the strobe power supply. Be sure that both ring terminals are grounded to the vehicle chassis ground.
 6. Plug the lighthead into the cable and plug the cable into the strobe power supply. Test operation of the lighthead before securing it to the vehicle.
 7. Secure the assembly onto the mounting surface with the supplied sheetmetal screws.

The outer surfaces of this product may be cleaned with mild soap and water. Use of any other chemicals may void product warranty. Do not use a pressure washer.

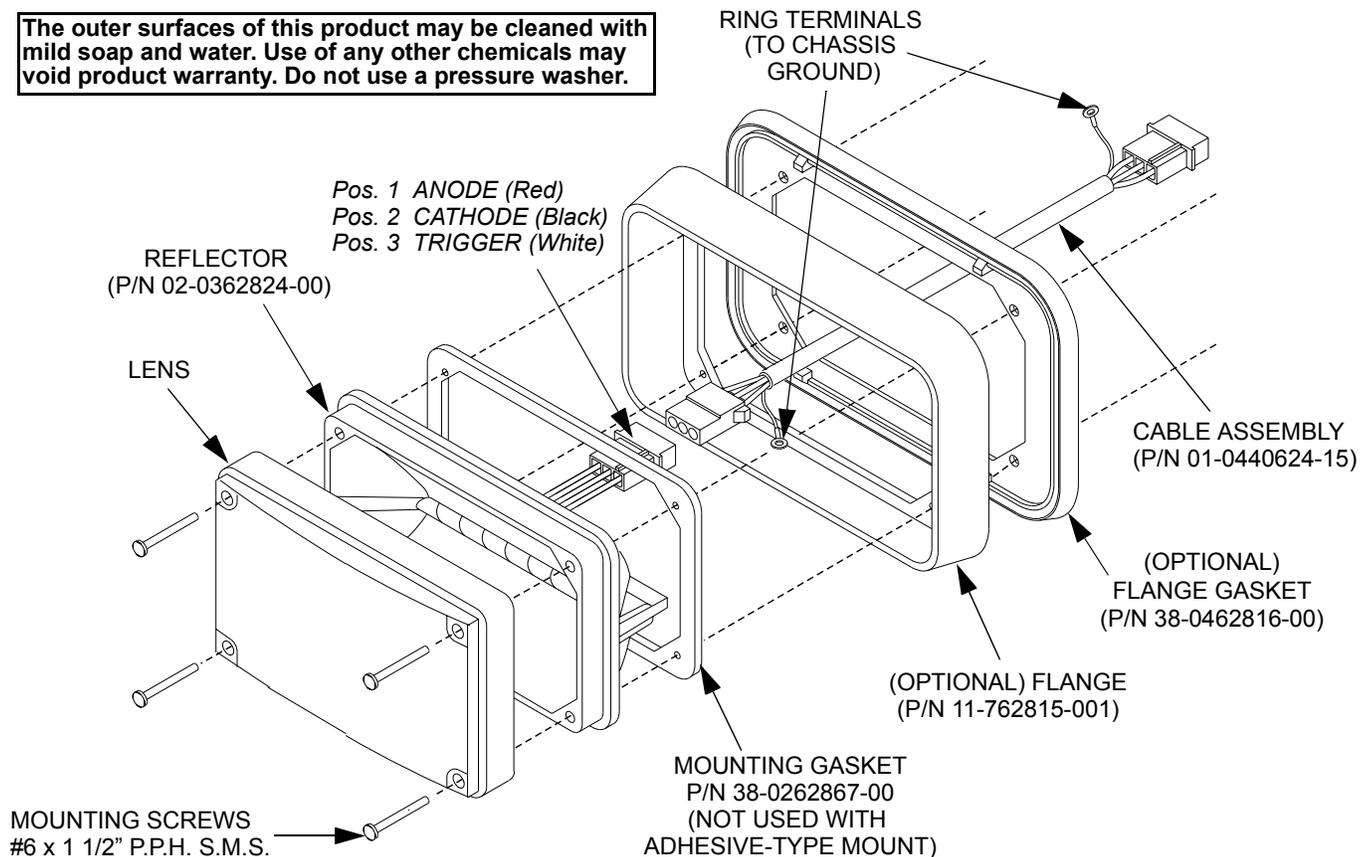

DO NOT PHOTOCOPY

IMPORTANT NOTE!

The template(s) included with this manual may not be to exact scale. Before drilling or cutting, always confirm all dimensions.

