

WHELEN[®]

ENGINEERING COMPANY INC.

Route 145, Winthrop Road,
Chester, Connecticut 06412

Phone: (860) 526-9504

Fax: (860) 526-4078

Internet: www.whelen.com


Sales e-mail: autosale@whelen.com

Canadian Sales e-mail: autocan@whelen.com


Customer Service e-mail: custserv@whelen.com

Magnetic Mount Kit For DC Voltage 1000-series Strobes Only

Automotive: Beacons

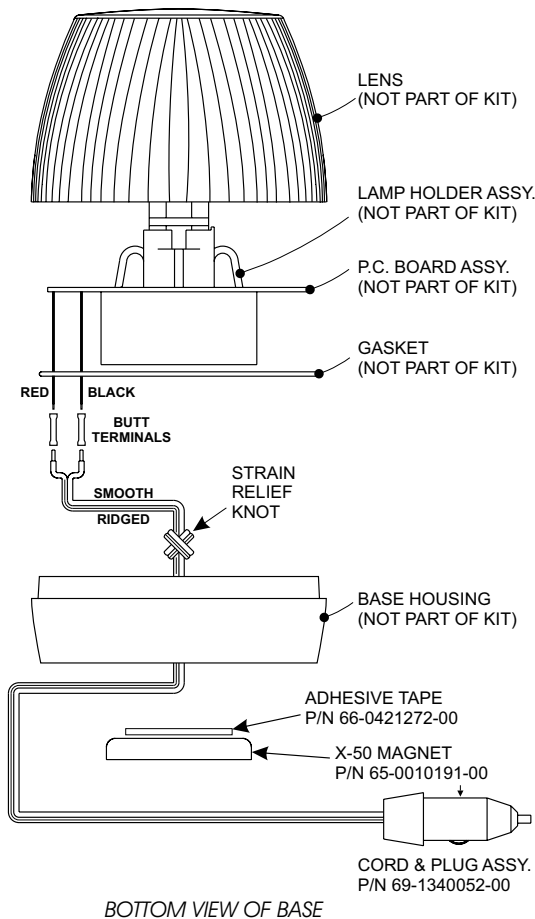

BOTTOM VIEW OF BASE

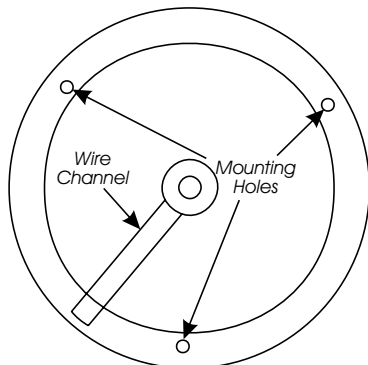

It is necessary to disassemble the strobe light head assembly in order to properly install the optional magnetic mount kit.

WARNING: The use of any magnetically mounted warning beacon on the outside of a vehicle while in motion is not recommended, and is at the sole discretion and risk of the user.

WARNING: The strobe power supply is a high voltage device. Do not remove strobe tubes or dismantle strobe light head assembly while in operation. Wait 10 minutes after turning off power before starting any work or trouble shooting.

1. Using a small straight blade screwdriver, pry the dome upward at the three pockets in the base, and remove the polycarbonate optic dome taking precautions not to damage or lose the dome gasket.
2. Remove the strobe power supply assembly from the base.
3. Insert the cigar cord up through the hole in the center of the base. Tie a knot in the cord 3 inches from the end to act as strain relief.
4. Strip the wire ends on the cigar cord 1/4 inch. Connect the ridged wire to the red wire and connect the smooth wire to the black wire of the strobe power supply assembly, using the butt splice terminals supplied.
5. Replace the strobe power supply assembly into the strobe light base, taking care not to pinch any wires.
6. Replace the dome by aligning the tabs on the dome with the pockets in the strobe light base. Make sure the dome gasket is in place. Press firmly on the dome to engage the retainer clips.
7. Lay the power cord in the wire channel in the base of the assembly (see bottom view). Remove the protective backing from the adhesive tape on the magnet and with the magnet centered on the base, adhere the magnet. Press firmly to ensure that a proper bond has been established.

The outer surfaces of this product may be cleaned with mild soap and water. Use of any other chemicals may void product warranty. Do not use a pressure washer.