
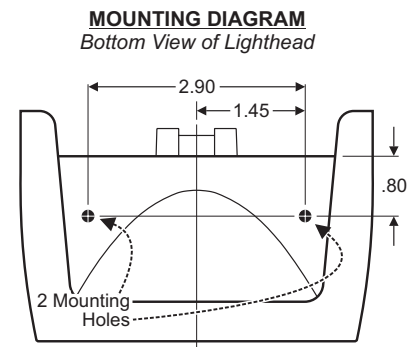


WHELEN®

ENGINEERING COMPANY INC.

51 Winthrop Road
 Chester, Connecticut 06412-0684
 Phone: (860) 526-9504
 Fax: (860) 526-4078
 Internet: www.whelen.com
 Sales e-mail: autosale@whelen.com
 Canadian Sales e-mail: autocan@whelen.com
 Customer Service e-mail: custserv@whelen.com

Installation Guide: Halogen Lighthouse (Grille-mount)

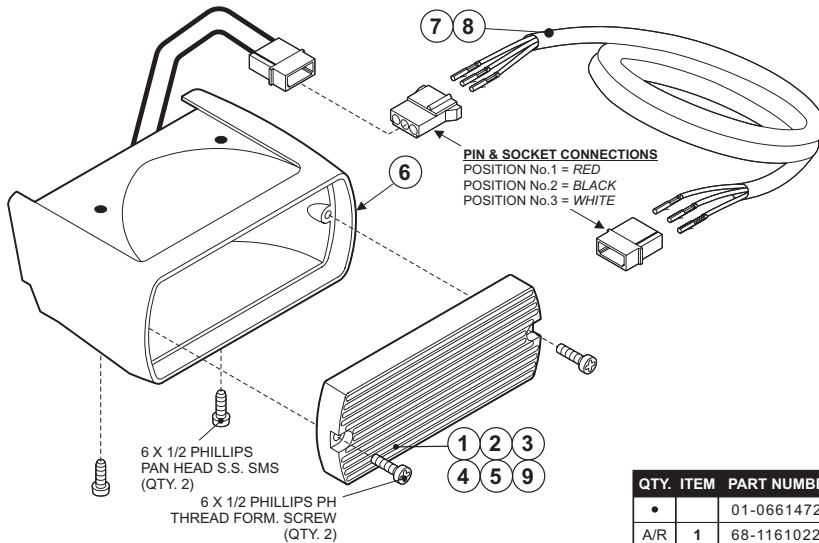


IMPORTANT: The outer surfaces of this product may be cleaned with mild soap and water. Use of any other chemicals may void product warranty. Do not use a pressure washer.

WARNING: All customer supplied wires that connect to the positive terminal of the battery, must be sized to supply at least 125% of the maximum operating current, and fused at the battery to carry the load.

QTY.	ITEM	PART NUMBER	DESCRIPTION
•		01-0661472-()	ASSEMBLY / GRILLE MODULE / HALOGEN
A/R	1	68-1161022-10	LENS / OPTIC / AMBER
A/R	2	68-1161022-20	LENS / OPTIC / BLUE
A/R	3	68-1161022-30	LENS / OPTIC / CLEAR
A/R	4	68-1161022-40	LENS / OPTIC / GREEN
A/R	5	68-1161022-50	LENS / OPTIC / RED
1	6	02-0341336-03	REFLECTOR ASSEMBLY
A/R	7	01-0440624-15	CABLE ASSEMBLY & INSTALL KIT - 15'
A/R	8	02-0240624-20	CABLE ASSEMBLY / 20' EXTENSION
A/R	9	02-0362801-*	SPLIT LENS (Specify lens colors in place of asterisks.)

EXAMPLE OF ORDERING CODE: 01-0661472-**A**1 **COLOR CODE** **CABLE CODE**

COLOR CODE: A = AMBER B = BLUE C = CLEAR G = GREEN R = RED V = VIOLET * = SPLIT
CABLE CODE: 1 = WITH CABLE 0 = WITHOUT CABLE

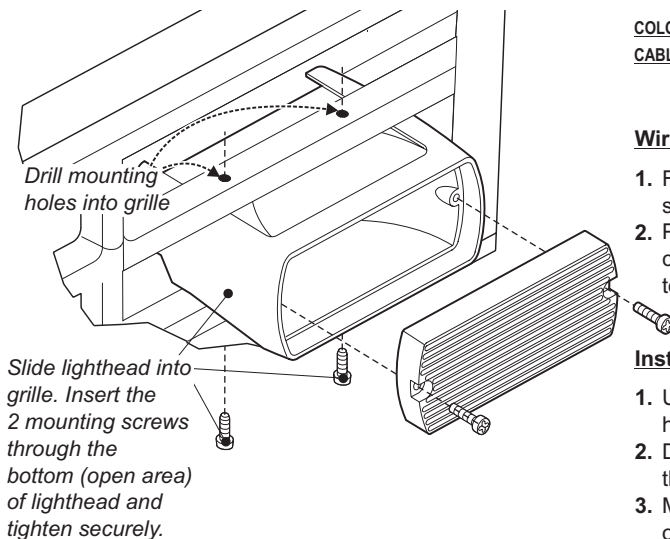

Wiring:

1. Find the pin and socket connectors and the extension cable supplied with the lighthouse and connect them as shown.
2. Plug the pin end of the extension cable into the socket connector coming from the lighthouse, the socket end will go to your power supply after installation is complete.

Installation

1. Using the lighthouse as a template mark the two mounting holes off onto the mounting surface.
2. Drill the mounting holes using an appropriately sized drill for the 6 X 1/2 Phillips Pan Head Sheet Metal Screws supplied.
3. Mount as shown. Lighthouse can be mounted either sitting on or hanging from the grille.