
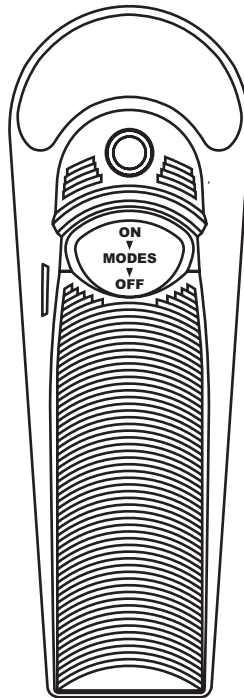


51 Winthrop Road,
Chester, Connecticut 06412
Phone: (860) 526-9504
Fax: (860) 526-4078
Sales Email:autosale@whelen.com
Canadian Sales:autocan@whelen.com
Customer Service:custserv@whelen.com

Safety First

This document provides all the necessary information to allow your Whelen product to be properly and safely installed. Before beginning the installation and/or operation of your new product, the installation technician and operator must read this manual completely. Important information is contained herein that could prevent serious injury or damage.

- Proper installation of this product requires the installer to have a good understanding of automotive electronics, systems and procedures.
- The installer **MUST** be sure that no vehicle components or other vital parts could be damaged by the drilling process. Check both sides of the mounting surface before drilling begins. Also de-burr any holes and remove any metal shards or remnants. Install grommets into all wire passage holes.
- Do not install this product or route any wires in the deployment area of your air bag. Equipment mounted or located in the air bag deployment area will damage or reduce the effectiveness of the air bag, or become a projectile that could cause serious personal injury or death. Refer to your vehicle owner's manual for the air bag deployment area. The User/Installer assumes full responsibility to determine proper mounting location, based on providing ultimate safety to all passengers inside the vehicle.
- If this product uses a remote device to activate or control this product, make sure that this control is located in an area that allows both the vehicle and the control to be operated safely in any driving condition.
- Do not attempt to activate or control this device in a hazardous driving situation.
- This product contains high-intensity LEDs. Do not stare directly into these lights. Momentary blindness and/or eye damage could result.
- Use only soap and water to clean the outer lens. Use of other chemicals could result in premature lens cracking (crazing) and discoloration. Lenses in this condition have significantly reduced effectiveness and should be replaced immediately. Inspect and operate this product regularly to confirm its proper operation and mounting condition. Do not use a pressure washer to clean this product.
- **WARNING!** All customer supplied wires that connect to the positive (+) terminal of the battery must be sized to supply at least 125% of the maximum operating current and **FUSED "at the battery"** to carry that load. **DO NOT USE CIRCUIT BREAKERS WITH THIS PRODUCT!**
- Failure to follow these precautions and instructions could result in damage to the product or vehicle and/or serious injury to you and your passengers!

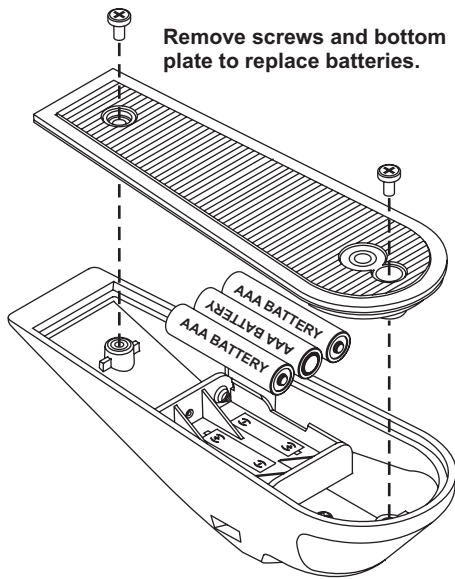

Size:AAA
Type:Alkaline*
Qty:3

***Do NOT use rechargeable batteries in this product!**

Operation:

Activate the unit by pressing the control button. Each subsequent press of this button advances the activation cycle. The activation cycle is as follows:
OFF / Mode 1 (Flashing) / Mode 2 (Flashing with tone) / Mode 3 / Flashlight (Steady on) > OFF.

Low Battery Information:

This unit is designed to alert users if a low battery condition exists. If the user tries to activate the unit when a low battery condition has been detected, the unit will produce a single flash and then turn off. Subsequent attempts to activate the unit will produce the same results.

If a low battery condition is detected while the unit is in operation, the current display mode will be replaced with a unique 'alert' mode and no other display modes will be available. If the unit exhibits either of these behaviors, immediately replace all 3 batteries. Batteries Not Included.

Optional Mounting:

An optional Belt Clip is available for the Door Ease™. This accessory is screwed into the threaded tripod mount located on the upper portion of the base of the unit.