


WHELEN[®]

ENGINEERING COMPANY INC.

51 Winthrop Road,
Chester, Connecticut 06412-0684
Phone: (860) 526-9504
Fax: (860) 526-4078

Installation Guide: Lightbar Roof Rack Mount STPKT67 ('05-'06 Ford Expedition)

Internet: www.whelen.com
Sales e-mail: autosale@whelen.com
Canadian Sales e-mail: autocan@whelen.com
Customer Service e-mail: custserv@whelen.com

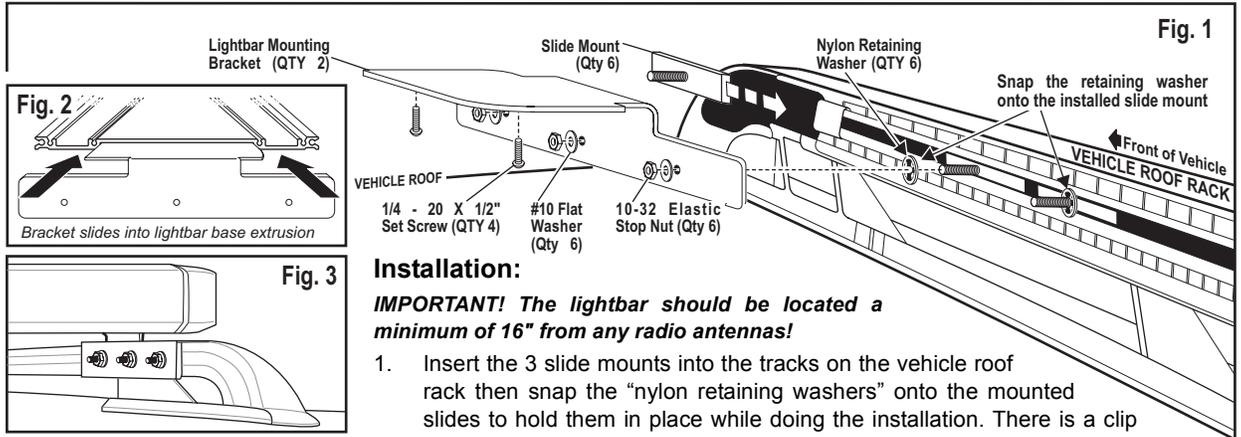

Installation:

IMPORTANT! The lightbar should be located a minimum of 16" from any radio antennas!

1. Insert the 3 slide mounts into the tracks on the vehicle roof rack then snap the "nylon retaining washers" onto the mounted slides to hold them in place while doing the installation. There is a clip on the rack at the end of the track that will keep the mounted slides in place. You do not have to remove this clip to insert the slides.
2. Slide both mounting brackets into their track in the bottom of the lightbar base extrusion (Fig. 2) and secure them there with the supplied set screws.
3. When you have positioned the mounting slides where you wish to mount the lightbar, secure the bracket to the slides using the supplied 10-32 elastic stop nuts and #10 flat washers (Fig. 3) and installation is complete.

©2005 Whelen Engineering Company Inc.
Form No.13969B (021307)

For warranty information regarding this product, visit www.whelen.com/warranty


WHELEN[®]

ENGINEERING COMPANY INC.

51 Winthrop Road,
Chester, Connecticut 06412-0684
Phone: (860) 526-9504
Fax: (860) 526-4078

Installation Guide: Lightbar Roof Rack Mount STPKT67 ('05-'06 Ford Expedition)

Internet: www.whelen.com
Sales e-mail: autosale@whelen.com
Canadian Sales e-mail: autocan@whelen.com
Customer Service e-mail: custserv@whelen.com

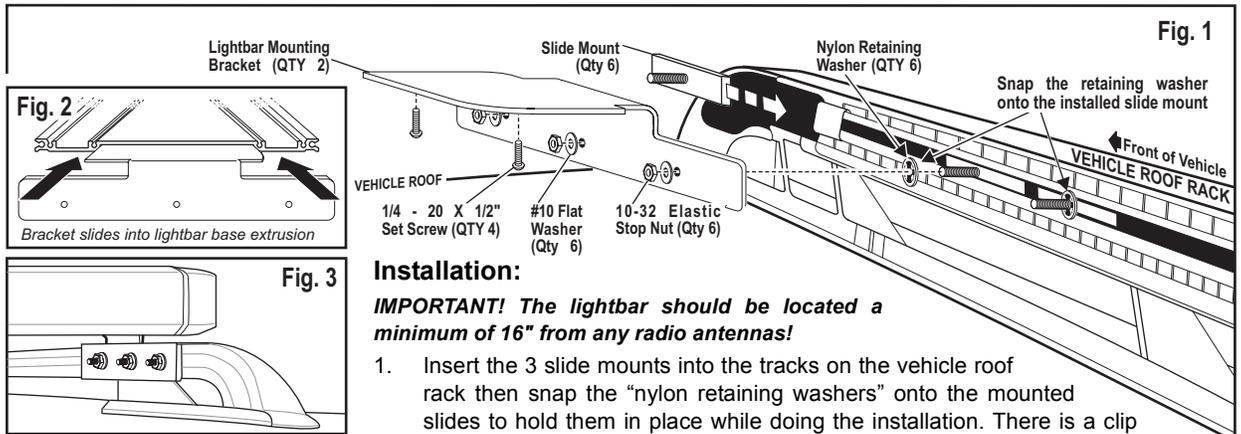

Installation:

IMPORTANT! The lightbar should be located a minimum of 16" from any radio antennas!

1. Insert the 3 slide mounts into the tracks on the vehicle roof rack then snap the "nylon retaining washers" onto the mounted slides to hold them in place while doing the installation. There is a clip on the rack at the end of the track that will keep the mounted slides in place. You do not have to remove this clip to insert the slides.
2. Slide both mounting brackets into their track in the bottom of the lightbar base extrusion (Fig. 2) and secure them there with the supplied set screws.
3. When you have positioned the mounting slides where you wish to mount the lightbar, secure the bracket to the slides using the supplied 10-32 elastic stop nuts and #10 flat washers (Fig. 3) and installation is complete.

©2005 Whelen Engineering Company Inc.
Form No.13969B (021307)

For warranty information regarding this product, visit www.whelen.com/warranty