

# WHELEN®

ENGINEERING COMPANY INC.

51 Winthrop Road,  
Chester, Connecticut 06412-0684  
Phone: (860) 526-9504  
Fax: (860) 526-4078


Internet: [www.whelen.com](http://www.whelen.com)  
Sales e-mail: [autosale@whelen.com](mailto:autosale@whelen.com)  
Canadian Sales e-mail: [autocan@whelen.com](mailto:autocan@whelen.com)  
Customer Service e-mail: [custserv@whelen.com](mailto:custserv@whelen.com)

## Installation Guide: Lighthead Kit SLDK\*\* Lighthead Kit SLEK\*\*

1. Disconnect the lightbar from the vehicle battery.
2. Using a Torx screwdriver, remove the endcap nearest to the installed location of the new lighthouse.
3. Slide the necessary lenses and lens dividers out of the extrusion until the desired lighthouse housing is accessible.
4. Using a small, flat blade screwdriver, gently disengage the lighthouse housing's retaining fingers from the filler panel's mounting tabs and remove panel from the lightbar.
5. Plug the new lighthouse connector into the connector found in the lighthouse housing and snap the lighthouse into place. Confirm all four retaining fingers fully engage the lighthouse's mounting tabs.
6. Reconnect the lightbar to the battery and test the operation of the newly installed lighthouse. If the

new lighthouse does not function properly, contact customer service.

7. Return the items removed in step 3 to their original position and remount the endcap. Tighten mounting screws to 40 in./lbs.

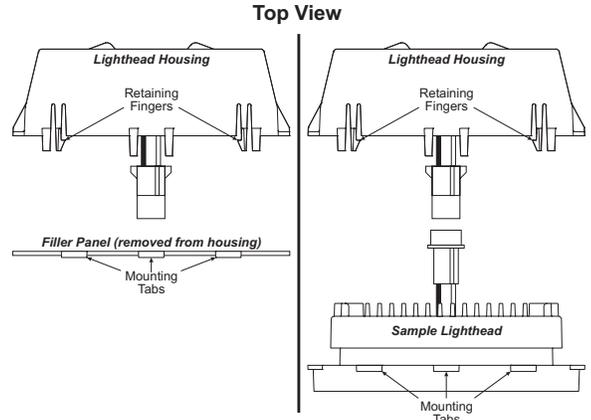

©2005 Whelen Engineering Company Inc.  
Form No.13989A (021207)

**For warranty information regarding this product, visit [www.whelen.com/warranty](http://www.whelen.com/warranty)**

# WHELEN®

ENGINEERING COMPANY INC.

51 Winthrop Road,  
Chester, Connecticut 06412-0684  
Phone: (860) 526-9504  
Fax: (860) 526-4078


Internet: [www.whelen.com](http://www.whelen.com)  
Sales e-mail: [autosale@whelen.com](mailto:autosale@whelen.com)  
Canadian Sales e-mail: [autocan@whelen.com](mailto:autocan@whelen.com)  
Customer Service e-mail: [custserv@whelen.com](mailto:custserv@whelen.com)

## Installation Guide: Lighthead Kit SLDK\*\* Lighthead Kit SLEK\*\*

1. Disconnect the lightbar from the vehicle battery.
2. Using a Torx screwdriver, remove the endcap nearest to the installed location of the new lighthouse.
3. Slide the necessary lenses and lens dividers out of the extrusion until the desired lighthouse housing is accessible.
4. Using a small, flat blade screwdriver, gently disengage the lighthouse housing's retaining fingers from the filler panel's mounting tabs and remove panel from the lightbar.
5. Plug the new lighthouse connector into the connector found in the lighthouse housing and snap the lighthouse into place. Confirm all four retaining fingers fully engage the lighthouse's mounting tabs.
6. Reconnect the lightbar to the battery and test the operation of the newly installed lighthouse. If the

new lighthouse does not function properly, contact customer service.

7. Return the items removed in step 3 to their original position and remount the endcap. Tighten mounting screws to 40 in./lbs.

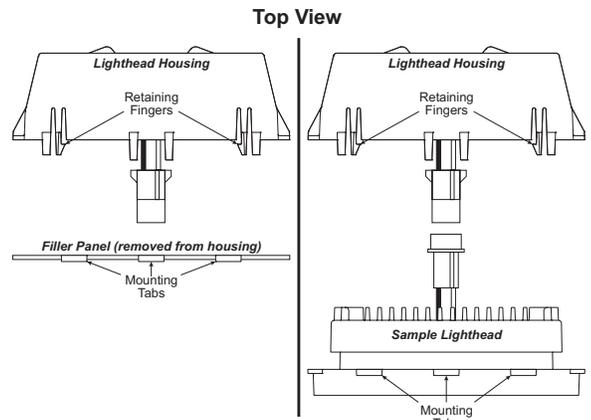

©2005 Whelen Engineering Company Inc.  
Form No.13989A (021207)

**For warranty information regarding this product, visit [www.whelen.com/warranty](http://www.whelen.com/warranty)**