

WHELEN[®]

ENGINEERING COMPANY INC.

51 Winthrop Road,
Chester, Connecticut 06412-0684
Phone: (860) 526-9504
Fax: (860) 526-4078

Installation Guide: Model RBKTHD6 or 5BKT2 Mounting Bracket Harley-Davidson[®] Passing / Fog Light Mount

Internet: www.whelen.com
Sales e-mail: autosale@whelen.com
Canadian Sales e-mail: autocan@whelen.com
Customer Service e-mail: custserv@whelen.com

Installation:

1. Remove the clamp ring from the fog light and lift the fog light out. Unscrew both wire terminals, cut the fork terminal off of the end of the GREY-BLACK wire and set the light aside.
2. Remove both allen-head screws from the passing light mounting bracket and unscrew the nut holding the wire guide. Carefully lower the light and let it hang while you slide the grey fog light wire out of the bottom of the tube.
3. Remove the washer indicated and replace it with the lighthead mounting bracket.

Reassembly:

1. Thread the fog light wire up through the guide tube until it protruds out of the fog light body.
2. Replace the nut on the bottom of the wire guide, then reattach the passing lights body with the 2 allen-head screws.
3. Reattach the 2 fog light wires removed previously (you can attach the wire you removed from the fork terminal with or without reinstalling another fork terminal.).
4. Secure the fog light with the clamp ring.
5. Mount the new lighthead to its bracket as shown.
6. Extend the lighthead wires to your power source and connect as described in the lighthead manual.

©2005 Whelen Engineering Company Inc.
Form No.13995A (060707)

For warranty information regarding this product, visit www.whelen.com/warranty

WHELEN[®]

ENGINEERING COMPANY INC.

51 Winthrop Road,
Chester, Connecticut 06412-0684
Phone: (860) 526-9504
Fax: (860) 526-4078

Installation Guide: Model RBKTHD6 or 5BKT2 Mounting Bracket Harley-Davidson[®] Passing / Fog Light Mount

Internet: www.whelen.com
Sales e-mail: autosale@whelen.com
Canadian Sales e-mail: autocan@whelen.com
Customer Service e-mail: custserv@whelen.com

Installation:

1. Remove the clamp ring from the fog light and lift the fog light out. Unscrew both wire terminals, cut the fork terminal off of the end of the GREY-BLACK wire and set the light aside.
2. Remove both allen-head screws from the passing light mounting bracket and unscrew the nut holding the wire guide. Carefully lower the light and let it hang while you slide the grey fog light wire out of the bottom of the tube.
3. Remove the washer indicated and replace it with the lighthead mounting bracket.


Reassembly:

1. Thread the fog light wire up through the guide tube until it protruds out of the fog light body.
2. Replace the nut on the bottom of the wire guide, then reattach the passing lights body with the 2 allen-head screws.
3. Reattach the 2 fog light wires removed previously (you can attach the wire you removed from the fork terminal with or without reinstalling another fork terminal.).
4. Secure the fog light with the clamp ring.
5. Mount the new lighthead to its bracket as shown.
6. Extend the lighthead wires to your power source and connect as described in the lighthead manual.

©2005 Whelen Engineering Company Inc.
Form No.13995A (060707)


For warranty information regarding this product, visit www.whelen.com/warranty

Disconnect the GREY-BLACK wire and cut the fork terminal off, then unscrew the other (ground) wire terminal and place the fog light aside. Slide the GREY-BLACK wire out of the bottom of the wire guide.

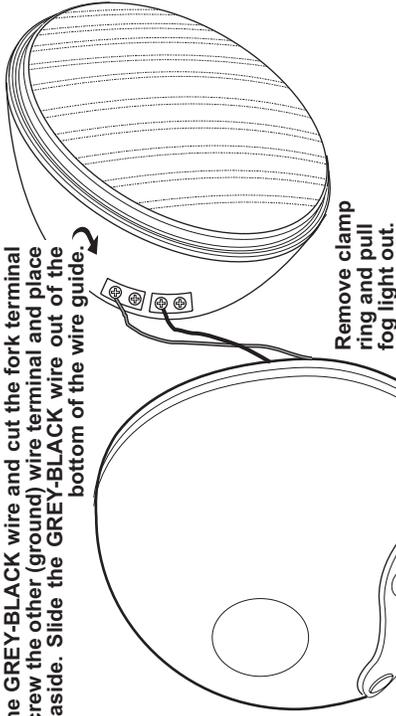


Remove clamp ring and pull fog light out.


Remove washer
Remove Allen screws

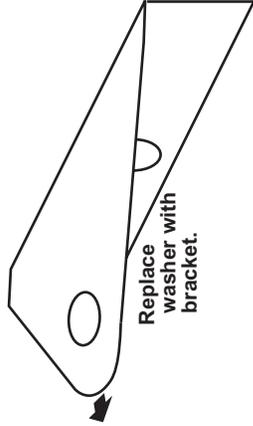

Replace washer with bracket.

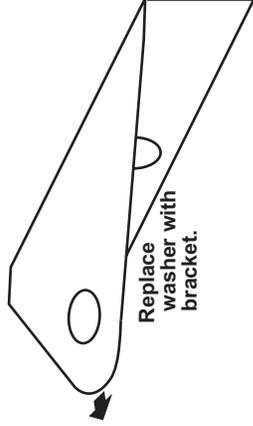


Disconnect the GREY-BLACK wire and cut the fork terminal off, then unscrew the other (ground) wire terminal and place the fog light aside. Slide the GREY-BLACK wire out of the bottom of the wire guide.


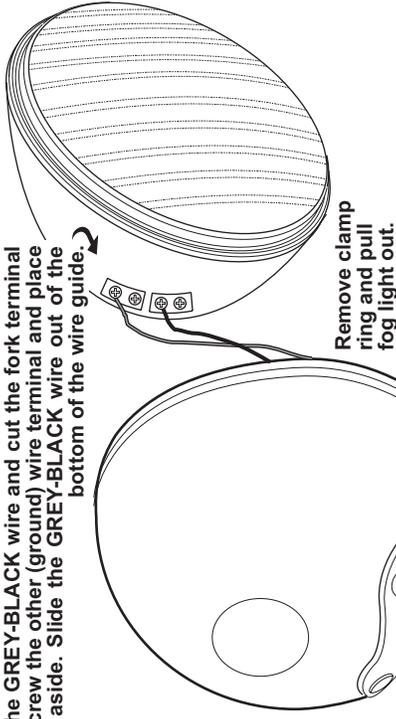


Remove clamp ring and pull fog light out.


Remove washer
Remove Allen screws

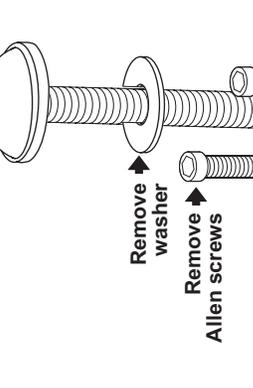

Replace washer with bracket.

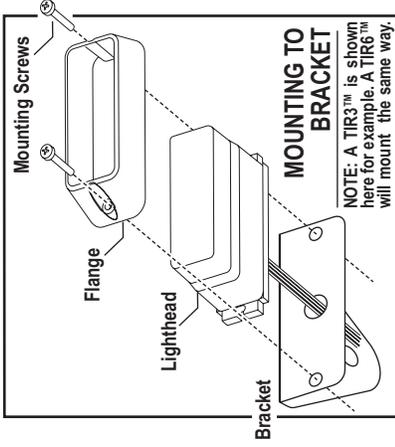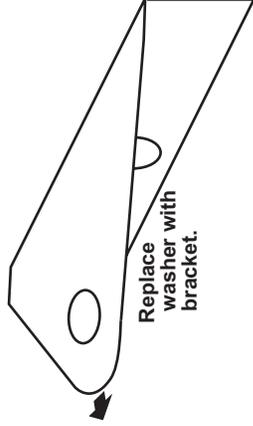

Pull GREY-BLACK wire from fog light; out here.

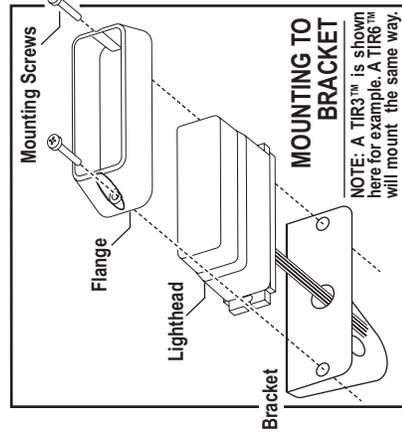

Remove nut
Pull GREY-BLACK wire from fog light; out here.

