


WHELEN[®]

ENGINEERING COMPANY INC.

51 Winthrop Road,
Chester, Connecticut 06412
Phone: (860) 526-9504
Fax: (860) 526-4078

Internet: www.whelen.com
Sales e-mail: autosale@whelen.com
Canadian Sales e-mail: canadiansales@whelen.com
Customer Service e-mail: custserv@whelen.com

Installation Guide:
Lightbar Roof Rack Mount
2007 - 2011 Ford Expedition
2011 Ford Explorer

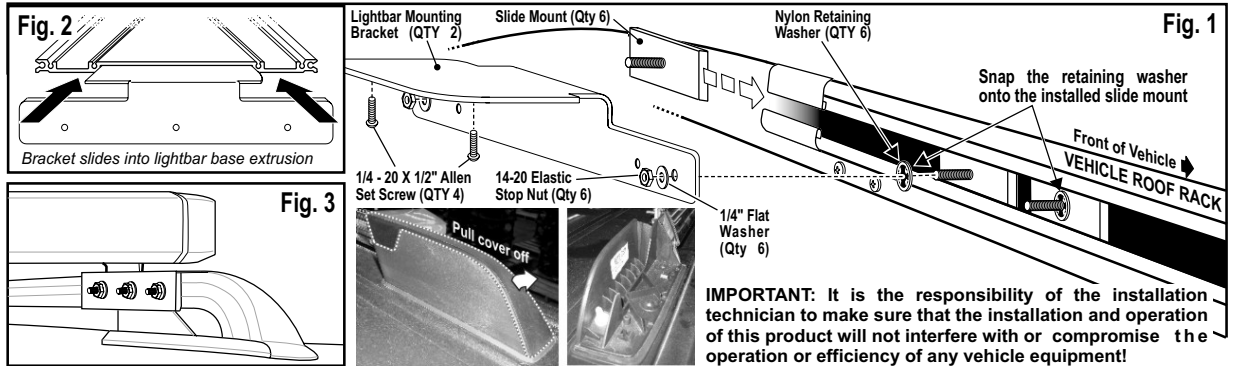

Installation:

IMPORTANT! The lightbar should be a minimum of 16" from any radio antennas!

1. Remove the cover from roof rack (see photos), insert the 3 slide mounts into the track in the roof rack and replace the cover (Fig. 1).
2. Snap the nylon retaining washers onto the slide mounts then secure the mounting bracket to the slide mounts with the supplied hardware.
3. Insert the 3 slide mounts into the tracks on the vehicle roof rack then snap the "nylon retaining washers" onto the slide locks. This will hold them in place while you are doing the installation.
4. Slide both mounting brackets into their track in the bottom of the lightbar base (Fig. 2) and secure them there with the supplied set screws.
5. When you have positioned the mounting slides where you wish to mount the lightbar, secure the bracket to the slides using the supplied 14-20 elastic stop nuts and 1/4" flat washers (Fig. 3) and installation is complete.

©2007 Whelen Engineering Company Inc.
Form No.14105A (020911)

For warranty information regarding this product, visit www.whelen.com/warranty


WHELEN[®]

ENGINEERING COMPANY INC.

51 Winthrop Road,
Chester, Connecticut 06412
Phone: (860) 526-9504
Fax: (860) 526-4078

Internet: www.whelen.com
Sales e-mail: autosale@whelen.com
Canadian Sales e-mail: canadiansales@whelen.com
Customer Service e-mail: custserv@whelen.com

Installation Guide:
Lightbar Roof Rack Mount
2007 - 2011 Ford Expedition
2011 Ford Explorer

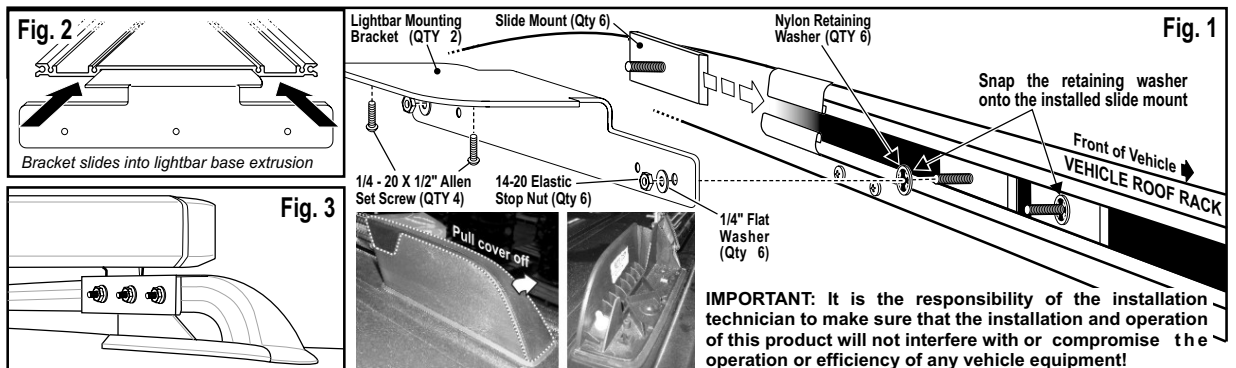

Installation:

IMPORTANT! The lightbar should be a minimum of 16" from any radio antennas!

1. Remove the cover from roof rack (see photos), insert the 3 slide mounts into the track in the roof rack and replace the cover (Fig. 1).
2. Snap the nylon retaining washers onto the slide mounts then secure the mounting bracket to the slide mounts with the supplied hardware.
3. Insert the 3 slide mounts into the tracks on the vehicle roof rack then snap the "nylon retaining washers" onto the slide locks. This will hold them in place while you are doing the installation.
4. Slide both mounting brackets into their track in the bottom of the lightbar base (Fig. 2) and secure them there with the supplied set screws.
5. When you have positioned the mounting slides where you wish to mount the lightbar, secure the bracket to the slides using the supplied 14-20 elastic stop nuts and 1/4" flat washers (Fig. 3) and installation is complete.

©2007 Whelen Engineering Company Inc.
Form No.14105A (020911)

For warranty information regarding this product, visit www.whelen.com/warranty