


ENGINEERING COMPANY, INC.

51 WINTHROP ROAD
 CHESTER, CONNECTICUT 06412-0684
 Tel.: (860) 526-9504
 Fax: (860) 526-4078

TS200 SERIES WIRING DIAGRAM

FOR THE MODELS; TS200S, TS200SI,
 TS200SG, TS200SE

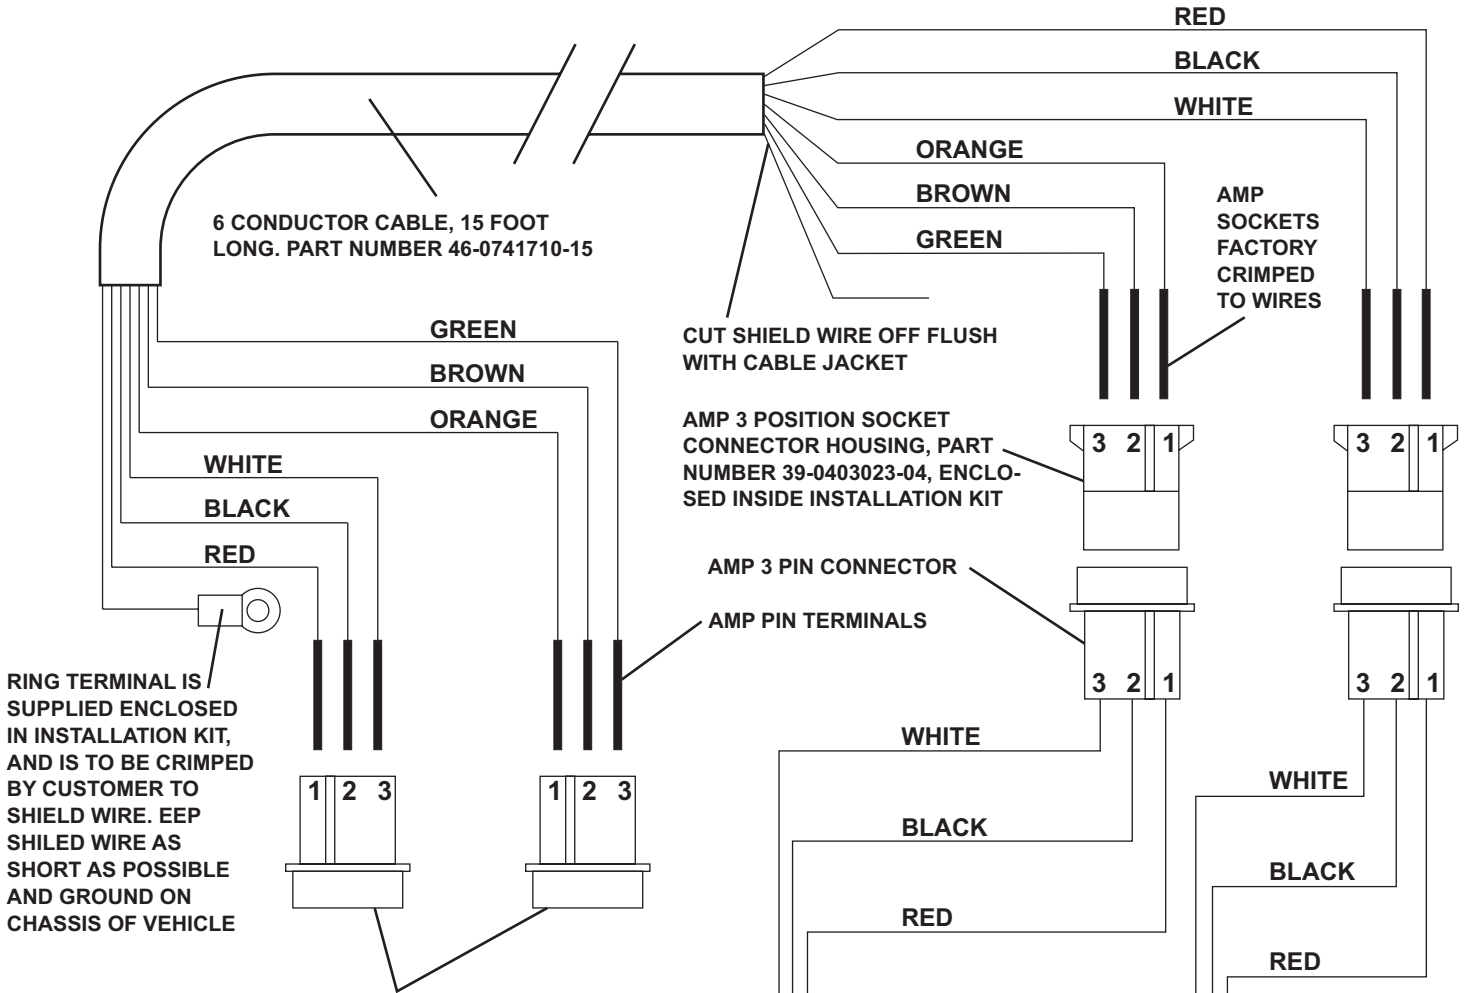


AMP 3 POSITION PIN CONNECTOR HOUSING, PART NUMBER 39-0403013-04.


THE SIX WIRES ON THIS END OF THE POWER CABLE, FEATURE THE PINS FACTORY CRIMPED ONTO THEM, AND THE TWO 3-POSITION AMP PIN HOUSINGS ENCLOSED SEPERATELY IN THE INSTALLATION KIT. THESE PINS WILL HAVE TO BE INSERTED AND LOCKED INTO THE TWO 3-POSITION AMP PIN HOUSINGS VIA THE NUMBERED SQUARE OPENINGS.

AFTER ASSEMBLING THESE CONNECTORS TO THE POWER CABLE, THEY ARE TO BE CONNECTED TO 2 ALTERNATING FLASHING STROBE LIGHT CONNECTORS LOCATED ON THE STROBE LIGHT POWER SUPPLY.

WARNING: The strobe light power supply is a high voltage device. Do not touch or remove tube assembly while in operation. Wait 10 minutes after turning off power before starting work or any trouble shooting on unit.

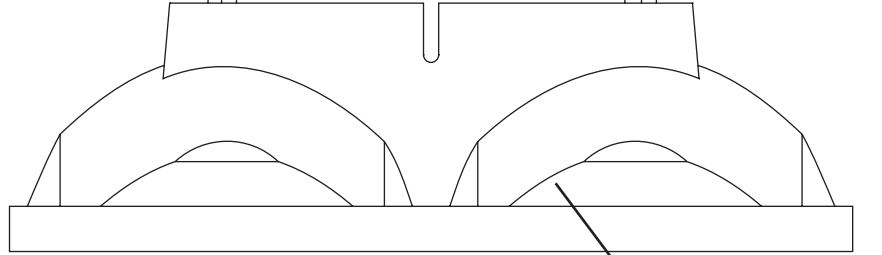

TWIN SIDE BEAM™ DUAL STROBE TUBE REFLECTOR ASSEMBLY, PART NUMBER 02-0361109-02



ALL WHELEN PRODUCTS ARE MANUFACTURED AND ASSEMBLED IN THE U.S.A.

WIRE COLOR DESCRIPTION.
 WHITE/GREEN WIRE, TRIGGER.
 RED/ORANGE WIRE, ANODE.
 BLACK/BROWN WIRE, CATHODE.