

WHELEN[®]

ENGINEERING COMPANY INC.




51 Winthrop Road
Chester, Connecticut 06412-0684
Phone: (860) 526-9504
Fax: (860) 526-4078
Internet: www.whelen.com
Sales e-mail: autosale@whelen.com
Canadian Sales e-mail: canadiansales@whelen.com
Customer Service e-mail: custserv@whelen.com

Installation Guide: 900 Series Scenelight Adaptor Plate

1. If present, disconnect and remove the existing scenelight and any round hole screw grommets from the mounting holes.
2. Apply a 1/8" bead of adhesive sealer around the perimeter of the rear of the adaptor plate. When properly applied, the sealer bead will cover to the edge of the adaptor plate. Place the adaptor plate onto the mounting surface so that the mounting holes are aligned

NOTE: If the opening for the previous scenelight was not created exactly as shown in the original scenelight installation guide, the adaptor may not cover the opening completely. If so, apply adhesive sealer around the adaptor plate to cover the opening.

3. Locate the round hole screw grommets included with your new scenelight. Insert these grommets through the mounting holes in the adaptor plate and mounting surface. Using a small rod (approx .062 dia.), press on the starting pin so that it is just below the face of the grommet (about .050"). This will spread the grommet prongs and lock the grommet in place. Do NOT press the starting pin out of the grommet! If the pin is pressed out, remove that grommet and install a new one.

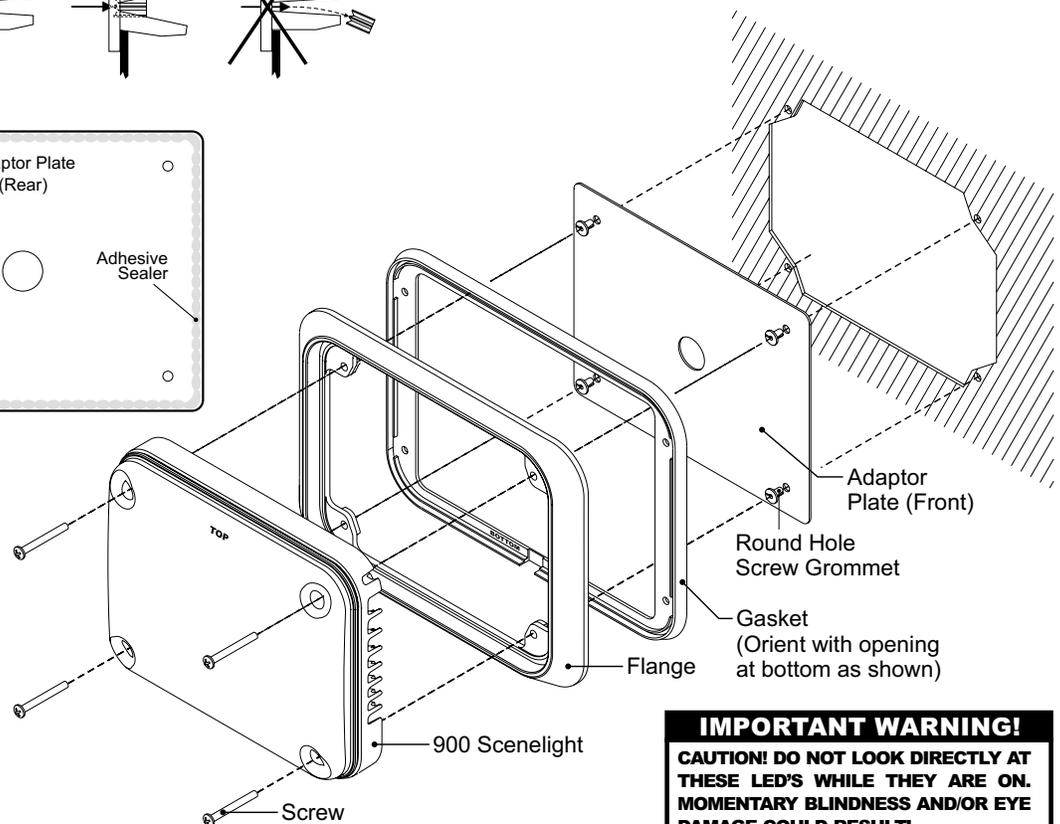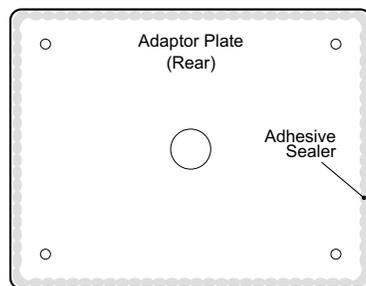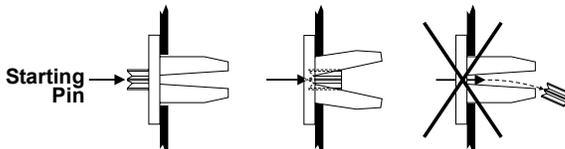

4. Route the wires through the flange (if present) and gasket. Extend the wires through the wire passage hole, make the appropriate connections and confirm proper operation of the light (refer to the guide included with your lighthouse for important wiring and fusing information).
5. Apply a soap and water solution to the face of the silicone wire exit seal.
6. Assemble the flange (if present) and the gasket onto the lighthouse as shown. Refer to the illustration for proper orientation of both the gasket and the lighthouse.
7. While holding all these components together, place the lighthouse assembly onto the mounting surface. **IMPORTANT!** When placing the assembly onto the mounting surface, it must NOT be moved or slid into its proper position. It must be placed directly into its proper position on the mounting surface.
8. Hold the lighthouse against the mounting surface and install the mounting screws. Make sure the screw tips are in the center of the grommet before tightening.

IMPORTANT! Before returning the vehicle to active service, visually confirm the proper operation of this product, as well as all vehicle components/equipment.

IMPORTANT WARNING!

CAUTION! DO NOT LOOK DIRECTLY AT THESE LED'S WHILE THEY ARE ON. MOMENTARY BLINDNESS AND/OR EYE DAMAGE COULD RESULT!