

PAR-36 Series

SUPER-LED® WORK LIGHTS

PAR-36 Super-LED work lights provide remarkably bright light output for thousands of operating hours. Available in either Spotlight, Floodlight, or combination Spot/Flood.



Hand Held Combination Spotlight/Floodlight

Rubber Swivel Housing Combination Spotlight/Floodlight

Stud/Swivel Spotlight 12 diode

Replacement Lamp Spotlight/Floodlight

Pedestal/Swivel Spotlight or Floodlight in Black and Chrome.

Stud/Swivel Floodlight 6 diode

Stud/Swivel Flood & Spot lights with On/Off switch

FEATURES

- Ultra bright Super-LED with low current draw and long life.
- 24 VDC available, contact factory.
- Five-year HDP® Heavy-Duty Professional warranty.

Pedestal/Swivel and Stud/Swivel Spotlights and Floodlights

- Choose from spotlight or floodlight in two intensities of 6 or 12 diodes.
- Choose pedestal/swivel or stud/ swivel mounting.
- Both mountings feature rugged die cast housing with ABS back cover available in Chrome or Black.
- Stud/swivel mount includes stainless steel bracket and hardware.
- Stud/swivel models with built-in On/Off switch.
- Lamps include 10" wires; contact factory for custom wire lengths and termination.
- 12 VDC.

Hand Held Spot/Floodlight

- Combination spotlight/floodlight.
- Hand held units includes 90lb. pull magnet mount, 8' coiled cord and cigar plug.
- Waterproof durable push button On/Off switch.
- 12/24 dual voltage.

Rubber Swivel Spot/Floodlight

- Combination spotlight/floodlight.
- Rubber housing with stud/swivel mount includes heavy-duty stainless steel bracket and hardware.
- 12/24 dual voltage.

Replacement Lamp Spot/Floodlights

- Combination spotlight/floodlight.
- Fresnel/Whelen TIR (Total Internal Reflector) technology combining spot and flood optics resulting in superior intensity and effectiveness
- 12/24 VDC dual voltage.
- 0.650 amp @ 12 VDC
0.325 amp @ 24 VDC.
- Non-polarity sensitive.
- Heavy-Duty military application.
- Tough polycarbonate replaceable outer lens.
- Water resistant.
- Metal, heat dissipating coated housing.
- 6 diode producing 500 usable lumens.

WHELEN®

PAR-36

SUPER-LED® WORKLIGHT

Floodlight/Spotlight Combination Models

Model No.	Mount	Diodes	Lumens	VDC	Amps	Switching	Dimensions
P36HHS	hand held	6	500	12/24	0.65 @ 12 VDC 0.325 @ 24 VDC	built-in waterproof on/off switch	9-3/8" (239mm) H x 3-1/2" (88mm) D x 4-5/8" (117mm) Dia.
P36SLCHG	rubber swivel					-	5-1/2" (140mm) H (excludes bolt) x 4-7/8" (122mm) Dia. x 3-5/8" (91mm) D.
P36SLC	replacement lamp						4-1/2" (111mm) Dia. x 2" (51mm) D.



Spotlight Models

Model No.	Mount	Diodes	Lumens	VDC	Amps	Switching	T-Handle	Rear Cover	Dimensions	
PSBP12	pedestal swivel	12	1000	12	1.70	built-in on/off switch	yes	Black	8-3/8" (211mm) H x 4-5/8" (117mm) D x 5" (127mm) Dia.	
PSBP12C		Chrome								
PSBP6		6	500					0.85		Black
PSBP6C		Chrome								
PSBS12	stud/ swivel	12	1000	12	1.70	-	-	Black	6-3/8" (162mm) H (excludes bolt) x 3" (76mm) D x 5" (127mm) Dia.	
PSBS12C		Chrome								
PSBS6		6	500					0.85		Black
PSBS6C		Chrome								
PSBS6S										Black
PSBS12S		12	1000					1.70		built-in on/off switch



Floodlight Models

Model No.	Mount	Diodes	Lumens	VDC	Amps	Switching	T-Handle	Rear Cover	Dimensions	
PFBP12	pedestal swivel	12	1000	12	1.70	built-in on/off switch	yes	Black	8-3/8" (211mm) H x 4-5/8" (117mm) D x 5" (127mm) Dia.	
PFBP12C		Chrome								
PFBP6		6	500					0.85		Black
PFBP6C		Chrome								
PFBS12	stud/ swivel	12	1000	12	1.70	-	-	Black	6-3/8" (162mm) H (excludes bolt) x 3" (76mm) D x 5" (127mm) Dia.	
PFBS12C		Chrome								
PFBS6		6	500					0.85		Black
PFBS6C		Chrome								
PFBS6S										Black
PFBS12S		12	1000					1.70		built-in on/off switch



PAR-36 LED and Halogen Comparison




PAR-36 Spotlight Comparisons



PAR-36 Halogen Lamp



P36SLC Super-LED Lamp

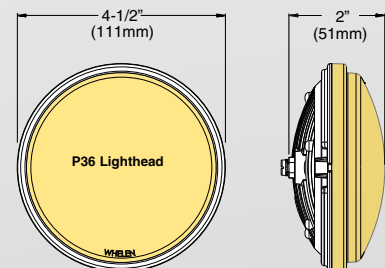

WHELEN®

ENGINEERING COMPANY, INC.

51 Winthrop Road
Chester, Connecticut 06412-0684
(860) 526-9504 • Fax: (860) 526-4078
www.whelen.com

Whelen Engineering reserves the right to upgrade and improve products without notice.
© 2014 Whelen Engineering Company, Inc. Printed in U.S.A.
Code No. 12608C - 05/14