

# WHELEN® 2901 One Cell

## Mass Notification Warning Product

**Whelen's Mass Notification WPS2900 series omni-directional voice product delivers clear, powerful voice communication.**

### System Features

- **WPS2901** - One Omni-Directional Speaker Cell Assembled in a Vertical Column
- Two Compartment (Type II) Natural Finish Aluminum Cabinet
- 109dBc @ 100'
- WPS2901 Speaker Cell Includes One High Efficiency 400 Watt **EZ-PULL™** Speaker Driver
- 50' Cable Included
- Pole Top Mounting Bracket Included
- Public Address Capability
- Battery Powered, Minimum of 30 Minutes of Full Power Output with Batteries of our Recommendation
- AC Temperature Compensated 10 Amp Battery Charger
- Local Controls or Remote Controls
- One Power Amplifier
- Electronic Controller
- Tone Generator
- Timer
- Local Control Push Buttons
- Battery Switch
- SI TEST®
- Battery Tray
- Lightning Arrestor
- Six Standard Public Warning Tones - Wail, Whoop, Attack, Hi-Lo, Alert, Airhorn

### System Options

- **SBC280** - Solar Power <sup>1</sup>
- **WPSBATT** - Delco S2000 or Interstate Workaholic 31-MHD Batteries
- **WPSNCMIC** - Noise Cancelling Microphone
- Alternate Tone Set
- **RDVM** - Digital Voice Message Capability <sup>2</sup>

#### NOTES:

- <sup>1</sup> Solar power option includes 2 - 80 watt panels, mounting bracket and regulator
- <sup>2</sup> **RDVM** - 1-16 message capability with 240, 480 or 960 seconds available for recording

### Activation Controls

Our VHF High and UHF Wide-Band activation control packages include the following:

- Radio
- Radio Interface
- Tone Squelch
- 2-3dB Gain Omni-Directional Antenna with Bracket
- 35' of RG58 Antenna Cable
- Polyphaser
- SI TEST®

- Low Battery Alarm (Two-Way only)

Other features are dependant upon one or two-way controls. Whelen equipment can be interfaced with many different types of two-way radio communications products and systems including 800Mhz trunking, Motorola's MOSCAD, FSK, Narrow-Band and VHF Low Band. The following is available as standard options. Contact factory for special applications.

#### One-Way Controls

- **AUXIN** - Auxiliary Board for Contact Closure Activation
- **D2020LL** - 10 Digit DTMF Landline Activation
- **D2020H** - 10 Digit DTMF VHF High Band / 150-170 Mhz
- **D2020U** - 10 Digit DTMF UHF / 450-470 Mhz
- **WPSTT** - Two-Tone Sequential Option

#### Two-Way Controls

- **AUXCS** - Two-Way Contact Closure Activation and Status Board
- **C2020LL** - Two-Way Landline Activation
- **C2020H** - 10 Digit DTMF VHF High Band / 150-170 Mhz
- **C2020U** - 10 Digit DTMF UHF / 450-470 Mhz
- **C2020NH** - 10 Digit DTMF VHF High Band Narrow-Band
- **C2020NU** - 10 Digit DTMF UHF Narrow-Band

#### Options:

- **FSKXMOD** - Converts the Above Activation Controls to FSK Format
- **STATUS** - Cabinet Window LED Status Indicator
- **PGINT** - Paging Interface to Interface Whelen Tones with Existing Paging Systems
- **INTRU** - Intrusion Alarm (available with two-way only)

Type II Electronic Cabinet



# WHELEN<sup>®</sup> 2901 Specifications

Component	Height Inches (CM)	Width Inches (CM)	Depth Inches (CM)	Weight Lbs. (KG)
WPS2901 SPEAKER	20.4 (51.8)	33.4 (84.8)	—	107 (48.6)
ELECTRONICS CABINET TYPE II	57.5 (146)	30.0 (76)	14.0 (35.5)	117 (53.1)
POLE TOP BRACKET	30.5 (77)	12.0 (30.5)	See Drawing	71 (32)

## Electrical

- **Battery Charger Input:** 120VAC, 60Hz, 7A fuse (240 VAC 50/60 Hz available)
- **Battery Charger Output:** 28VDC, 10A (NOMINAL)
- **Batteries:** (2) 12V, 115AH lead calcium
- **Standby Current:** 135mA, 24VDC
- **Operating Current:** 23A, 24VDC
- **Power Amplifier Output Power:** **Tone:** 400 Watts  
**Voice:** 500 Watts

## Environmental

- **Operating Temperature:** -35°C to +60°C
- **Storage Temperature:** -65°C to +125°C
- **Humidity, Non Condensing:** 0 to 95%

## Ordering Information

### BASIC SYSTEM INCLUDES ALL OF THE FOLLOWING:

- **WPS2901** - Speaker Assembly & Electronics Cabinet
- OPTIONS:**
- **RDVM** - Remote Station Digital Voice <sup>1</sup>
- **AUXIN** - Auxiliary Board for Contact Closure Activation
- **AUXCS** - Auxiliary / Status Control Board for Contact Closure Activation and Status
- **D2020LL, D2020H, D2020U** - One-Way Radio Control <sup>2</sup>
- **C2020LL, C2020H, C2020U** - Two-Way Radio Control / Status Monitoring, COMM/STAT™ <sup>2</sup>
- **C2020NH, C2020NU** - Two-Way Narrow Band Radio Control / Status Monitoring, COMM/STAT™ <sup>2</sup>
- **WPSTT** - Two-Tone Sequential
- **FSKXMOD** - FSK Format
- **STATUS** - Cabinet Window LED Status Indicator
- **PGINT** - Paging Interface to Interface Whelen Tones with Existing Paging Systems
- **INTRU** - Intrusion Alarm
- **SBC280** - Solar Power <sup>3</sup>

### NOTES

- <sup>1</sup> **RDVM** - 1-16 message capability with 240, 480 or 960 seconds available for recording
- <sup>2</sup> 10 digit DTMF Controls • Landline • VHF High Band / 150-170 Mhz • UHF / 450-470 Mhz  
Our VHF High and UHF activation control packages include tone squelch, radio, radio interface, 2-3dB gain omni-directional antenna with bracket, 35' of RG58 antenna cable and polyphaser
- <sup>3</sup> Solar power option includes 2 - 80 watt panels, mounting bracket and regulator


## Acoustic Performance

SPL @ 100': 109dBC


Estimated 70dB range: 1,500'

Estimated 60dB range: 3,000'

Note: 100' performance levels listed represent repeatable results within +/-1dB to stated levels. Estimated 70dB perimeter is based on the Federal Emergency Management Agency's (FEMA) -10dB per distance doubled path model.

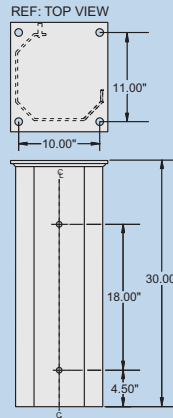

Pole Top Bracket

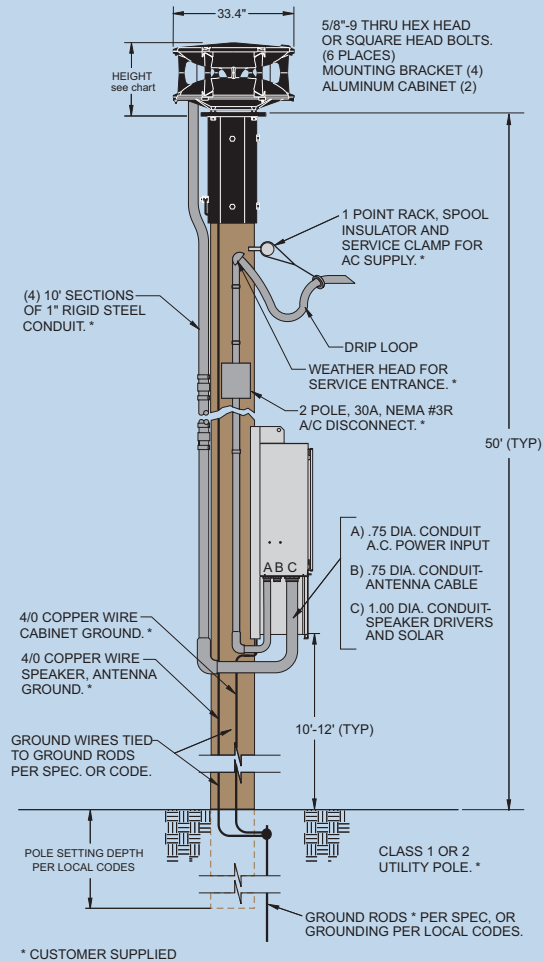

**WHELEN<sup>®</sup>**  
ENGINEERING COMPANY, INC.

MASS NOTIFICATION PRODUCTS

51 Winthrop Road  
Chester, Connecticut 06412-0684  
(860) 526-9504  
1-800-637-4736  
Fax: (860) 526-4784

Internet: [www.whelen.com](http://www.whelen.com)  
e-mail: [iowsales@whelen.com](mailto:iowsales@whelen.com)

Whelen Engineering Company, Inc.  
reserves the right to upgrade its products with  
design improvements without notification.  
© 2010 Whelen Engineering Company, Inc.  
Printed in the U.S.A.  
032210-11694D