


CORE-C™ DEFAULT CONFIGURATION

This configuration only works out of the box with Edge® 9X Lightbars

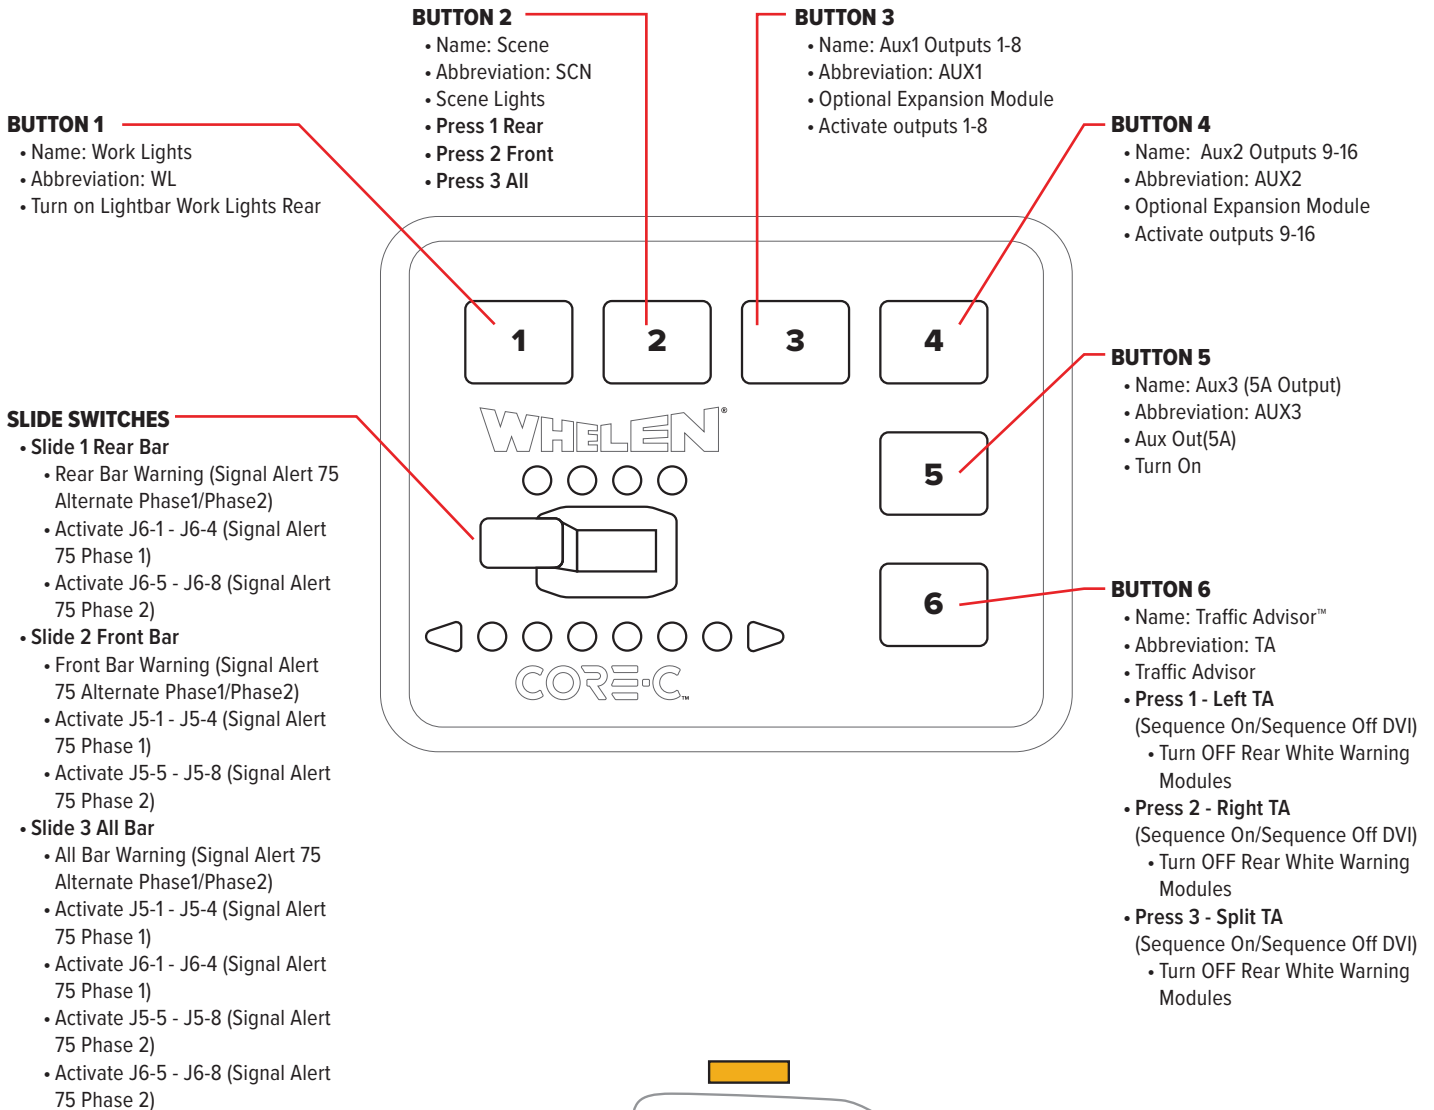

*Amber/White color configuration is best suited for this program.

OPTIONAL REMOTE 16 EXPANSION INPUTS

- J9-1/6 Park Kill
- J9-2/7 Brake
- J9-3/8 Unassigned
- J9-4/9 Unassigned

OPTIONAL SITUATIONAL AWARENESS (REMOTE 16 EXPANSION REQUIRED)

- Front Day Park Event
 - Remote 16 Expansion > J9-1/6 Park Kill > is > On > and : Checkbox Checked
 - DUO™ Edge® 9X Lightbar A/W > Lightbar Light Sensor > is > Day > and : Checkbox Checked
 - Core-C > Slide Switch > is > Slide 2 Front Bar > Or : Checkbox Checked
 - Core-C > Slide Switch > is > Slide 3 All Bar : Checkbox Checked
- Link the OR conditions C. and D.
- Front Bar Warning (DVI™ Single Flash 75 Day, In/Out Phasing)
- Activate J5-1 - J5-2, J5-7 - J5-8 (DVI Single Flash 75 Day, Phase 1)
- Activate J5-3 - J5-6 (DVI Single Flash 75 Day, Phase 2)
- Rear Day Park Event
 - Remote 16 Expansion > J9-1/6 Park Kill > is > On > and : Checkbox Checked
 - DUO Edge 9X Lightbar A/W > Lightbar Light Sensor > is > Day > and : Checkbox Checked
 - Core-C > Slide Switch > is > Slide 1 Rear Bar > Or : Checkbox Checked
 - Core-C > Slide Switch > is > Slide 3 All Bar : Checkbox Checked
- Link the OR conditions C. and D.
- Rear Bar Warning (DVI Single Flash 75 Day, In/Out Phasing)
- Activate J6-1 - J6-2, J6-7 - J6-8 (DVI Single Flash 75 Day, Phase 1)
- Activate J6-3 - J6-6 (DVI Single Flash 75 Day, Phase 2)

BRAKE MODE


- Brake Event
 - Remote 16 Expansion > J9-2/7 Brake > is > On > and : Checkbox Checked
 - Core-C > Slide Switch > is not > OFF : Checkbox Checked
- Rear Bar Warning (Turn OFF All Rear Warning Modules)
- Rear Bar Inboard Amber (Set Pattern Brake Alert)

NIGHT PARK MODE

- Front Night Park Event
 - Remote 16 Expansion > J9-1/6 Park Kill > is > On > and : Checkbox Checked
 - DUO Edge 9X Lightbar A/W > Lightbar Light Sensor > is > Night > and : Checkbox Checked
 - Core-C > Slide Switch > is > Slide 2 Front Bar > Or : Checkbox Checked
 - Core-C > Slide Switch > is > Slide 3 All Bar : Checkbox Checked
- Link the OR conditions C. and D.
- Front Bar Warning (DVI Single Flash 60 Night, In/Out Phasing)
- Activate J5-1 - J5-2, J5-7 - J5-8 (DVI Single Flash 60 Night, Phase 1)
- Activate J5-3 - J5-6 (DVI Single Flash 60 Night, Phase 2)
- Rear Night Park Event
 - Remote 16 Expansion > J9-1/6 Park Kill > is > On > and : Checkbox Checked
 - DUO Edge 9X Lightbar A/W > Lightbar Light Sensor > is > Night > and : Checkbox Checked
 - Core-C > Slide Switch > is > Slide 1 Rear Bar > Or : Checkbox Checked
 - Core-C > Slide Switch > is > Slide 3 All Bar : Checkbox Checked
- Link the OR conditions C. and D.
- Rear Bar Warning (DVI Single Flash 60 Night, In/Out Phasing)
- Activate J6-1 - J6-2, J6-7 - J6-8 (DVI Single Flash 60 Night, Phase 1)
- Activate J6-3 - J6-6 (DVI Single Flash 60 Night, Phase 2)

PRIORITIES

1. Traffic Advisor
2. Lightbar Light Sensor
3. J9-1/6 Park Kill
4. J9-2/7 Brake
5. J9-3/8
6. J9-4/9
7. Work Lights
8. Scene
9. Aux1 Outputs 1-8
10. Aux2 Outputs 9-16
11. Aux3 (5A Output)
12. Slide Switch

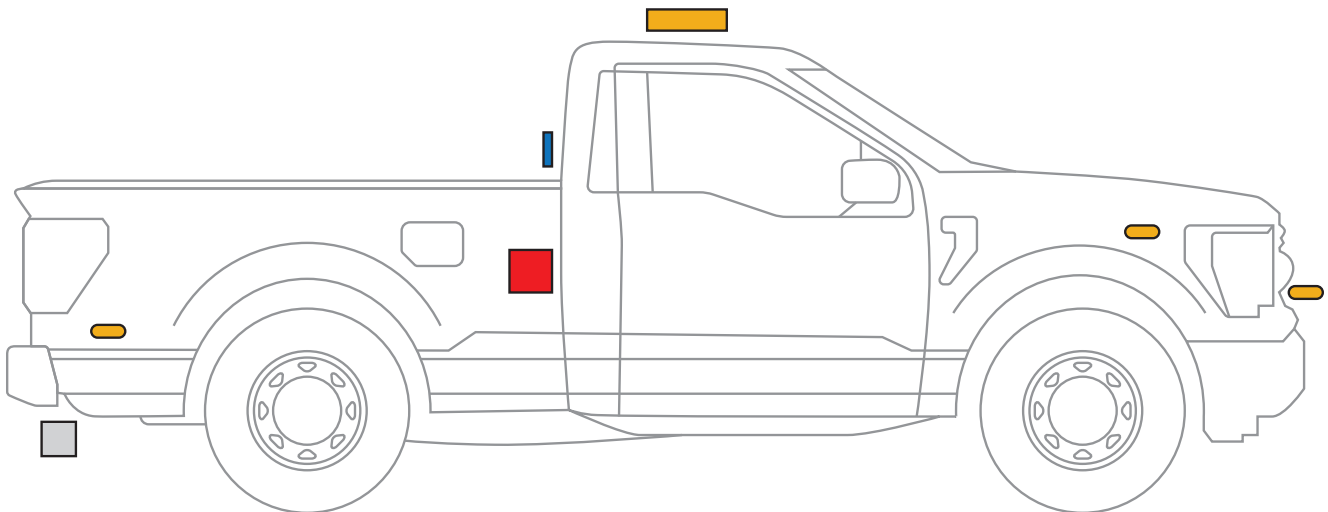

WHELEN ENGINEERING COMPANY, INC.

51 Winthrop Road
Chester, Connecticut 06412
www.whelen.com
@WhelenENG

All products proudly
designed, manufactured,
and assembled in the U.S.A.
• ISO 9001 Registered QMS

Whelen Engineering reserves the right to upgrade and
improve products without notice.
© 2023 Whelen Engineering Company, Inc. Printed in U.S.A.
Code No. P13475A - 08/2023